


Technical Specification

LG Hausys Floors [ALLROAD] : Homogeneous Sheet/Commercial

Technical Data-ISO 10581

Characteristic	Method	Unit	Result
Surface treatment			Easy Clean UV
Format			Homogeneous Sheet
Classification	ISO 10581		34/43
Roll length		m	20
Width	ISO 24341(EN 426)	mm	2,000
Thickness	ISO 24346(EN 428)	mm	2.0
Weight	ISO 23997(EN 430)	g/m ²	3,100
Residual indentation	ISO 24343-1(EN 433)		Fullfilled
Dimensional stability	ISO 23999(EN 434)		Fullfilled
Color fastness to light	ISO 105-B02		≥ 6
Wear resistance	EN 660-2		Group T
Castor chair suitability	ISO 4918(EN 425)		No damage
Reaction to fire	EN 13501-1		Bfl-s1
Chemical resistance	ISO 26987(EN 423)		Passes
Slip resistance	EN 13893		DS
	DIN 51130		R9
Flexibility	ISO 24344(EN 434)		no crack
Body voltage	EN 1815	kV	< 2
Thermal resistance	EN 12664		Suitable for underfloor heating

Product Standard : ISO 10581

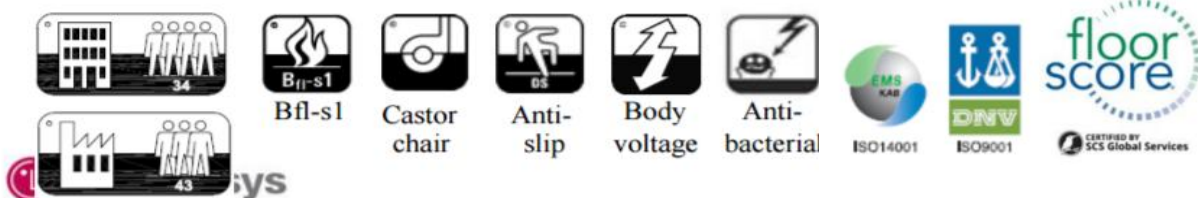

LG Hausys_Spec Sheet_ALLROAD

Update : 2016-10-13

<http://www.lghausys.com>